

Lanyard 4-Channel IR Receiver

Don't miss a single sound.

Listen®

www.listentech.com



The Listen LR-44 Lanyard 4-Channel IR Receiver is comfortably worn around the neck and earphones are plugged into the receiver. The receiver can receive up to four channels in mono or stereo. It uses standard AAA alkaline batteries for more than 30 hours of use, or a NiMH rechargeable battery pack that delivers 15 hours per charge. The unit features auto shut-off after 30 minutes of no carrier, further extending battery life. The LR-44 boasts high performance audio specs in a small package and is compatible with other manufacturers' products. The LR-44 is used for government compliance (such as ADA), assistive listening, language interpretation, live theatre, houses of worship, courtrooms, secure rooms and for auditory description.

Configuration
LR-44

Highlights

- Secure wireless communication – ideal for applications where isolation of the signal is important or where security is a concern
- Accepts most types of earphones – gives flexibility to the user preference of earphone
- Stylish, comfortable design and easy to use
- Receives up to 4 channels mono or stereo – provides outstanding performance with crystal clear sound
- Uses standard AAA batteries (available anywhere) or rechargeable Listen NiMH battery pack – gives you ultimate flexibility in managing battery life
- Auto shut-off feature (after 30 minutes of no audio carrier) - saves battery life
- Adjustable lanyard to get just the right fit

Architectural Specification

The Lanyard IR Receiver shall be capable of receiving on four carriers (2.3, 2.8, 3.3, 3.8 MHz) and the channel shall be displayed on one of four front panel LEDs. The receiver will accept mono or stereo earphones with a 3.5mm connector. The receiver shall be capable of being locked on a channel. The receiver shall be capable of receiving a stereo signal on each of the four carriers. The receiver shall have a SNR of 58 db or greater and have built in squelch control. The device shall have an audio frequency response of 63 Hz to 15 kHz, +/- 3db and shall have distortion of less than 2%. The device shall operate for 30 hours with two AAA alkaline batteries and 15 hours with two AAA NiMH rechargeable batteries. The receiver shall be covered by a limited lifetime warranty. The LR-44 is specified.

Requires


LA-363 High Capacity AAA Alkaline Batteries (Qty: 2)
LT-82 Stationary IR Transmitter
LA-140 IR Radiator

Includes

LR-44 Lanyard Receiver
LA-152 Alkaline Battery Compartment
Quick Reference Card

Used With

LR-42 Stethoscope 4-Channel IR Receiver

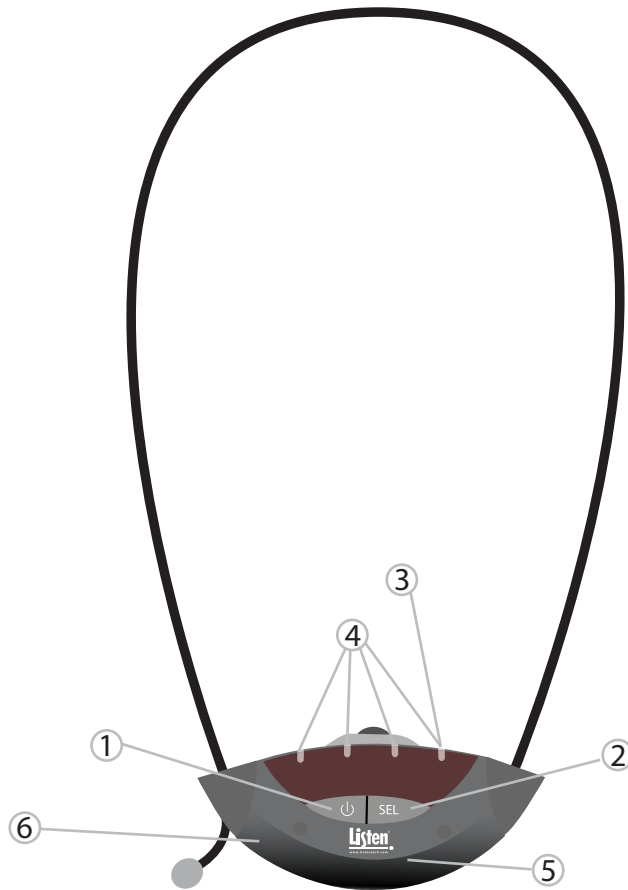

Product Features

1. Power: Press to turn on the unit, press and hold turn the unit off
2. SEL: Press to change channels
3. Indicates operating channel 1 through 4
4. Indicates status of the batteries when the Power button is pressed momentarily
5. Removable battery compartment (AAA alkaline batteries or NiMH rechargeable battery pack)
6. Headphone Jack: Connect stereo or mono 35 mm headphone here

Accessories



LA-152
IR Alkaline battery compartment-
included with receiver



LA-364
NIMH Rechargeable Battery Pack-
requires LA-350 Charging Station



LA-150
Replacement Lanyard for LR-44



LA-350
8-Unit IR Receiver
Charging/Storage Station-
LA-364 required



LA-351
8-Unit IR Receiver Storage Station



LA-161
Single Ear Bud



LA-162
Stereo Ear Bud



LA-164
Earspeaker



LA-165
Stereo Headphones



LA-166
Neck Loop



LA-170
Behind-the-Head Headphones



LBB 3441/10
Bosch Under-the-Chin
Stereo Headphones



LBB 3441/00
Bosch Stereo Headphones

	Specifications	LR-44
RF	Carrier Frequencies	2.3 MHz, 2.8 MHz, 3.3 MHz, 3.8 MHz
	Number of Channels	4 selectable channels
	IR Detectors	2 detectors under front IR lens
	Sensitivity	1 nW/cm ² at 40 db SNR
	Frequency Accuracy	+/- .005% stability 0 to 50C
	Squelch	Automatic on loss of RF signal (40 db SNR)
	Compliance	FCC Part 15, Industry Canada, CE

Audio	** All system specifications are wireless end-to-end	
	System Frequency Response	63Hz - 15kHz (+/- 3dB)
	System Signal to Noise Ratio (A-weighted)	>58dB
	System Distortion	<2% total harmonic distortion (THD)
	Audio Output Jacks	3.5 mm connector unbalanced, mono or stereo headphones
	Audio Output Power	20 mW maximum at 32 ohms

Controls	User Controls	Volume, Power, Channel Select
	Programming	Channel Lock, Auto Find, Auto Seek, Auto Shut-Off, Audible Option

Indicators	Unit Power	Indicated by current channel selection LED
	Channel Selection	Red LED illuminates on the current channel selection
	Audible Indicator	Audio beep in headset indicates low batteries, channel lock, power on/off. Can be disabled in programming mode. Default: On

Power	Battery Type	Two AAA alkaline batteries or NiMH battery pack
	Battery Life	30 hours alkaline, 15 hours NiMH rechargeable pack (LA-364)
	Battery Charging	Fully Automatic with NiMH battery pack and LA-350 charger

Physical	Dimensions (H x W x D)	1.8 x 4 x .75 inches (46 x 102 x 19 mm)
	Color	Dark grey with White Silk Screening
	Unit Weight without batteries	1.75 ounces (49 grams)
	Unit Weight with batteries	2.55 ounces (74 grams)
	Shipping Weight	8 ounces (227 grams)

Environmental	Temperature - Operation	-10 C (14 F) to +40 (104 F)
	Temperature - Storage	-20 C (-4 F) to +50 (122 F)
	Humidity	0 to 95% relative humidity, non-condensing

Related Systems

LS-80-SIR – Basic Stationary IR System

Includes:

- (1) LT-82 Stationary IR Transmitter
- (1) LA-140 Stationary IR Radiator
- (4) LR-42 Stethoscope 4-Channel IR Receivers
- (4) LA-363 High Performance AAA Alkaline Battery sets (Pkg of 2)
- (1) LA-304 ADA Compliance Signage Kit



LS-81-SIR – Performance Stationary IR System

Includes:

- (1) LT-82 Stationary IR Transmitter
- (1) LA-326 Universal Rack Mounting Kit
- (2) LA-140 Stationary IR Radiator
- (4) LR-42 Stethoscope 4-Channel IR Receivers
- (4) LA-363 High Performance AAA Alkaline Battery sets (Pkg of 2)
- (1) LA-351 8-Unit IR Receiver Storage Station
- (1) LA-304 ADA Compliance Signage Kit



LS-82-SIR – Advanced Installed IR System

Includes:

- (1) LT-82 Stationary IR Transmitter
- (1) LA-326 Universal Rack Mounting Kit
- (2) LA-140 Stationary IR Radiator
- (8) LR-42 Stethoscope 4-Channel IR Receivers
- (8) LA-364 NiMH Rechargeable Battery Pack
- (1) LA-350 8-Unit IR Receiver Charging/Storage Station
- (1) LA-304 ADA Compliance Signage Kit



LS-83-SIR – 4-Channel, 48-Listener Stationary IR System

Includes:

- (4) LT-82 Stationary IR Transmitter
- (2) LA-326 Universal Rack Mounting Kit
- (8) LA-140 Stationary IR Radiator
- (48) LR-42 Stethoscope 4-Channel IR Receivers
- (48) LA-364 NiMH Rechargeable Battery Pack
- (6) LA-350 8-Unit IR Receiver Charging/Storage Station
- (2) LA-304 ADA Compliance Signage Kit



Frequently Asked Questions

- Q How many receivers can be used in a system?
A Infinite number - there is no limit.
- Q How do you replace the batteries in the receiver?
A For non-rechargeable batteries (AAA alkaline), remove the battery compartment and replace the batteries with fresh AAA alkaline batteries. For rechargeable NiMH batteries, simply replace the sealed battery pack with a freshly charged pack.
- Q How do I recharge the NiMH batteries?
A Use the Listen LA-350 8-Unit Charging/Storage unit. This unit will charge batteries that are in or out of receivers that are in our NiMH Rechargeable Battery Pack.
- Q How does the receiver know if the signal is mono or stereo?
A It automatically detects the type of signal and responds accordingly.
- Q My stereo signals are a bit noisy. How can I resolve this problem?
A Add more radiators. When you are transmitting stereo signals, the signal is degraded slightly. Increasing your radiator coverage will help mitigate this.
- Q What happens when there is no signal from the radiators?
A The receiver's audio signal is muted and after 20 minutes and the unit automatically shuts down to conserve battery life.
- Q How does the user select carriers?
A By pressing the SELECT button.
- Q Can the receiver automatically find a carrier?
A Yes, it will automatically seek and find all available carriers when the power is turned on. If no carrier is found, the unit will stop on the last used channel.
- Q Can I use a mono or stereo earphone with the LR-44?
A Yes.
- Q Can I use this receiver with a hearing aide?
A Yes, with the Listen LA-166 neckloop the receiver will be compatible with hearing aides that have a built-in t-coil.