



Ethernet Universal Physical Interface Modules for the Juniper Networks Secure Services Gateway and J-series Services Routers

The Ethernet Universal Physical Interface

Modules offer high densities of 10/100/1000 copper Ethernet or fiber Gigabit Ethernet ports. These ports offer the rich set of Layer 2–7 services available via Juniper Networks ScreenOS software on the Secure Services Gateway (SSG) series or Juniper Networks JUNOS software on the J-series Services Routers.

Product Description

Juniper Networks Ethernet Universal Physical Interface Modules (UPIMs) are a set of interface modules shared between the Juniper Networks SSG 140, 320M, 350M, 520, 520M, 550, 550M security products and the J-series J2320, J2350, J4350, and J6350 routers. These modules implement the full set of Layer 3–7 services offered in the ScreenOS and JUNOS operating systems and alternatively implement Layer 2 Ethernet switching for connecting local servers and PCs to the network.

Four UPIM models are available:


- 1-port 100/1000 Ethernet with a small form-factor pluggable transceiver (SFP) slot. You choose from a variety of SFPs to implement 100 Mbps or 1 Gbps Ethernet.
- 6-port Gigabit Ethernet with SFP slots. You choose from a wide variety of SFPs to implement different types of fiber optic or copper interfaces. The SFPs are sold separately from the module.
- 8-port 10/100/1000 copper Ethernet.
- 16-port 10/100/1000 copper Ethernet. This module is double the height of the standard PIM, so it requires two vertically adjacent PIM slots in the chassis.

Architecture and Key Components

The Ethernet UPIMs are highly flexible interfaces that give the network designer the tools to solve a wide variety of networking problems.


Metro Ethernet WAN Links

The 1-port 100/1000 Ethernet SFP interface is ideal for connecting to a Metro Ethernet service with a variety of fiber-optic SFPs. This interface allows you to deploy 100 Mbps service today and upgrade to 1 Gbps simply by replacing the SFP.




Network Segmentation

The Ethernet UPIMs can be used to subnet or segment network traffic by configuring each Ethernet port as a separate routed network or subnet. This localizes broadcast and multicast traffic to a local segment and allows different security policies to be applied to each subnet.

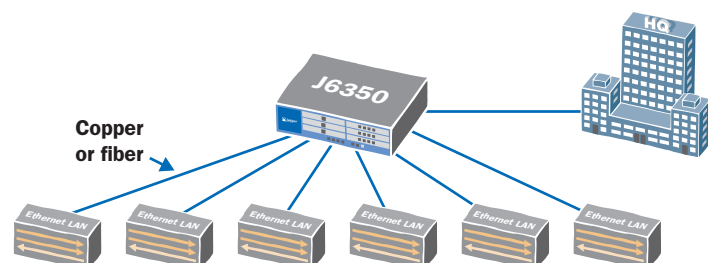


Security Zones

Many organizations need to improve internal security and keep critical information private within departments. At the same time, they need to provide guest access and protect local resources. The Ethernet UPIMs give the network designer the extra Ethernet ports necessary to implement security zones for departmental access.

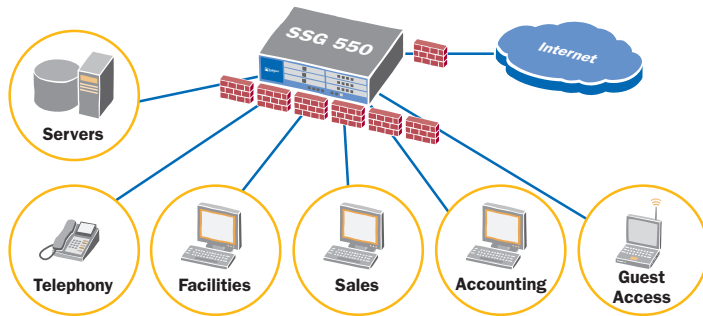

Local Workgroups

The network designer can use the Ethernet switching capability of the Ethernet UPIMs to create local workgroups. Integrating Layer 2 switching into the SSG or J-series saves space and simplifies management by using a single user interface to configure the switch and the SSG or J-series router.

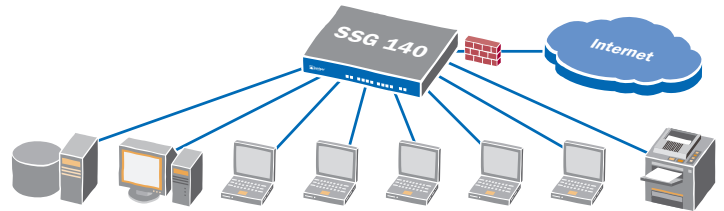

Ethernet UPIM Features and Benefits

Feature	Feature Description	Benefit
8- or 16-port copper Ethernet and 1- or 6-port SFP Gigabit Ethernet modules	<ul style="list-style-type: none"> Provides Gigabit Ethernet connectivity Flexible for various applications, including multiport copper or fiber applications 	Provides current or new infrastructure in the local site and ports for future expansion
Fits in PIM or enhanced PIM slots	UPIMs for use in regular PIM or enhanced PIM high-speed slots	Increases performance in the enhanced PIM slots in SSG 500s and J4350/J6350, while also providing connectivity and functionality in all PIM slots in all supported platforms
High-density Ethernet connectivity	Provides additional Ethernet ports in security/routing devices	Increases deployment flexibility and cost effectiveness for branch and midrange routing and/or security platforms
Local switching	Provides switching and broadcast across ports in the card (software release and configuration dependent)	Integrates switching into high-performance branch-office and midrange secure routing platforms to reduce operational costs and consolidate the number of networking devices in the branch office or regional site

Product Options

The list of available SFP modules for the Gigabit Ethernet with SFP slots is shown under “Ordering Information” below.

Supported Platforms

Part Number	SSG 140, SSG 320M, SSG 350M, SSG 520, SSG 520M, SSG 550, SSG 550M	J2320, J2350, J4350, J6350
JXU-1SFP-S	Yes	Yes
JXU-6GE-SFP-S	Yes	Yes
JXU-8GE-TX-S	Yes	Yes
JXU-16GE-TX-S	Yes	Yes

Specifications

Specification	1-Port Ethernet UPIM (JXU-1SFP-S)	6-Port Ethernet UPIM (JXU-6GE-SFP-S)	8-Port Ethernet UPIM (JXU-8GE-TX-S)	16-Port Ethernet UPIM (JXU-16GE-TX-S)
Connector	1 SFP cage, SFP sold separately	6 SFP cages, SFPs sold separately	8 RJ-45	16 RJ-45
MDI/MDI-X	N/A	N/A	Auto-correcting MDI/MDI-X	Auto-correcting MDI/MDI-X
Ethernet speeds	100 Mbps or 1 Gbps	1 Gbps	10/100/1000 Mbps, autosensing	10/100/1000 Mbps, autosensing
Duplex	Auto-negotiation or manual setting for duplex	Auto-negotiation or manual setting for duplex	Auto-negotiation or manual setting for duplex	Auto-negotiation or manual setting for duplex
PIM slots required*	One PIM or enhanced PIM slot	One PIM or enhanced PIM slot	One PIM or enhanced PIM slot	Double-height PIM requires two vertically adjacent PIM or enhanced PIM slots
LEDs	Link and activity	Link and activity	Link and activity	Link and activity
Dimensions (W x H x D)	5.45 in x 0.63 in x 6.5 in 13.8 cm x 1.6 cm x 16.5 cm	5.45 in x 0.63 in x 6.5 in 13.8 cm x 1.6 cm x 16.5 cm	5.45 in x 0.63 in x 6.5 in 13.8 cm x 1.6 cm x 16.5 cm	6.4 in x 1.2 in x 7.8 in 16.2 cm x 3 cm x 19.7 cm
Weight	8.6 oz (245 g)	8.2 oz (230 g)	8.6 oz (245 g)	11.6 oz (330 g)
Environmental	Operating temperature: 32–104° F (0–40° C) Storage temperature: -40–158° F (-40–70° C) Relative humidity: 5% to 90% noncondensing			

Safety and compliance

Safety	CAN/CSA-C22.2 No.60950/UL 60950 Third Edition, Safety of Information Technology Equipment EN 60950 (2000) Third Edition—Safety of Information Technology Equipment
EMC	FCC Part 15 Class B EN 55022 Class B AS/NZS 3548 Class B VCCI Class B
Immunity	EN-61000-4-2 ESD EN-61000-4-3 Radiated Immunity EN-61000-4-4 EFT EN-61000-4-5 Surge EN-61000-4-6 Low Frequency Common Immunity

*Enhanced PIM slot is recommended for higher performance.

Ordering Information

UPIM Part Numbers

Part Number	Description
JXU-1SFP-S	1-Port SFP 100 Mbps or Gigabit Ethernet Universal PIM (SFP sold separately)
JXU-6GE-SFP-S	6-port SFP Gigabit Ethernet Universal PIM (SFPs sold separately)
JXU-8GE-TX-S	8-port Gigabit Ethernet 10/100/1000 Copper Universal PIM
JXU-16GE-TX-S	16-port Gigabit Ethernet 10/100/1000 Copper Universal PIM

SFP Modules for the 1-Port and 6-port UPIMs

Part Number	Description	Supported on JXU-1SFP-S	Supported on JXU-6GE-SFP-S
JX-SFP-1GE-LX	SFP 1000Base-LX Gigabit Optical Transceiver SFP Module	Yes	Yes
JX-SFP-1GE-SX	SFP 1000Base-SX Gigabit Optical Transceiver SFP Module	Yes	Yes
JX-SFP-1GE-T	SFP 1000Base-T Gigabit Copper Transceiver SFP Module	Yes	Yes
JX-SFP-1FE-FX	SFP 100Base-FX Optical Transceiver SFP Module	Yes	No

Operating System Versions

Part Number	ScreenOS Version	JUNOS Version
JXU-1SFP-S	6.0r2	8.4
JXU-6GE-SFP-S	6.0	8.3
JXU-8GE-TX-S		
JXU-16GE-TX-S		

Note: These are the minimum operating system versions that support the UPIMs. Some features may require later versions.

About Juniper Networks

Juniper Networks, Inc. is the leader in high-performance networking. Juniper offers a high-performance network infrastructure that creates a responsive and trusted environment for accelerating the deployment of services and applications over a single network. This fuels high-performance businesses. Additional information can be found at www.juniper.net



CORPORATE HEADQUARTERS
AND SALES HEADQUARTERS FOR
NORTH AND SOUTH AMERICA
Juniper Networks, Inc.
1194 North Mathilda Avenue
Sunnyvale, CA 94089 USA
Phone: 888.JUNIPER (888.586.4737)
or 408.745.2000
Fax: 408.745.2100
www.juniper.net

EUROPE, MIDDLE EAST, AFRICA
REGIONAL SALES HEADQUARTERS
Juniper Networks (UK) Limited
Building 1
Aviator Park
Station Road
Addlestone
Surrey, KT15 2PG, U.K.
Phone: 44.(0).1372.385500
Fax: 44.(0).1372.385501

EAST COAST OFFICE
Juniper Networks, Inc.
10 Technology Park Drive
Westford, MA 01886-3146 USA
Phone: 978.589.5800
Fax: 978.589.0800

ASIA PACIFIC REGIONAL SALES HEADQUARTERS
Juniper Networks (Hong Kong) Ltd.
Suite 2507-11, 25/F
ICBC Tower
Citibank Plaza, 3 Garden Road
Central, Hong Kong
Phone: 852.2332.3636
Fax: 852.2574.7803

Copyright 2007 Juniper Networks, Inc. All rights reserved. Juniper Networks, the Juniper Networks logo, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. JUNOS and JUNOSe are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners. Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

100196-002 July 2007

To purchase Juniper Networks solutions, please contact your Juniper Networks sales representative at 1-866-298-6428 or authorized reseller.